


SECTION 1 INFORMATION AND REQUIREMENTS

1.0 APPLIANCE INFORMATION

Model	BPRL**RN
Gas Type	G20
Main injector (1 off)	Cat 82 size 360
Pilot Type	ERTA-PG-82-330
Max. Gross Heat Input :	5.4kW
Min. Gross Heat Input :	3.7kW
Cold Pressure :	20.0 +/-1.0 mbar
Ignition :	Via remote, integral to control system
Electrode Spark Gap	4.0mm
Packed Weight	29.5kg
Gas Connection :	8mm Compression (supplied with fire)

Fig. 1

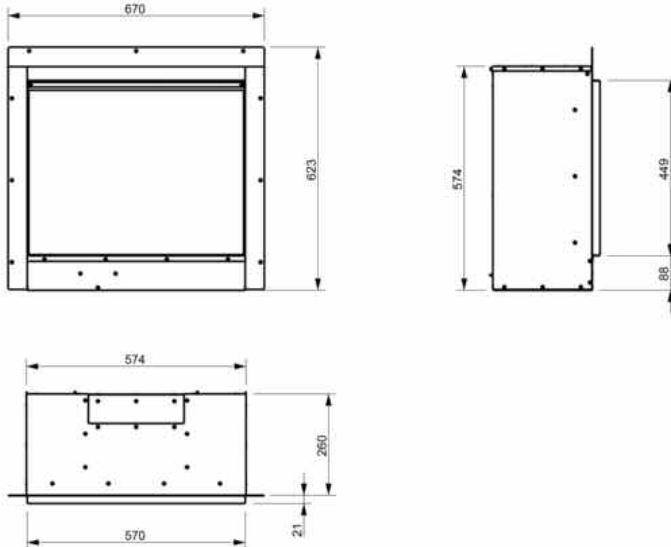

Appliance Efficiency Declaration

The efficiency of this appliance has been measured as specified in BS 7977-1 : 2009 +A1 : 2013 and the result is 79.6%. The net calorific value of the fuel has been used for this efficiency calculation.

The test data from which it has been calculated has been certified by BSI. The efficiency value may be used in the UK Government's Standard Assessment Procedure (SAP) for energy rating of dwellings.